



上海瑞千合

上海瑞千合进出口有限公司

Shanghai Ruiqianhe Import & Export Co., Ltd

Overview of Modular Multi-axle trailer (Goldhofer thp/sl copy)


The transportation industry is facing the new challenges, because more and more large sized equipments are developed day after day. We combine global advanced technology and local techniques to develop new modular platform trailer (Goldhofer thp/sl copy), the loading capacity range is from 40T to 15000T.

Unit Specifications

Two axle-lines Modular Multi-axle trailer

Axle Qty	2	
Speed (Km/h)	5	80
Maximum Total Mass (t)	68	32.8
Curb Weight (t)	7	
Rated Load (t)	61	25.8
Axle Load (t)	34	16.4
Length (mm)	3000	
Width (mm)	3000	
Height (mm)	1175±300	
Wheelbase (mm)	1500	
Wheel Tread (mm)	1800	
Tire Spec	215/75R17.5 135/133J	
Rim Spec	6.00-17.5	
Tire Qty	16	
Wheel Angle	55°	
Turn Radius (mm)	450(inside), 4070(outside)	

Add: Room 2621,building 3,no.277,Zheqiao Road, PuDong, ShangHai China
Tel: +86-21-60514593
Fax: +86-21-60875039

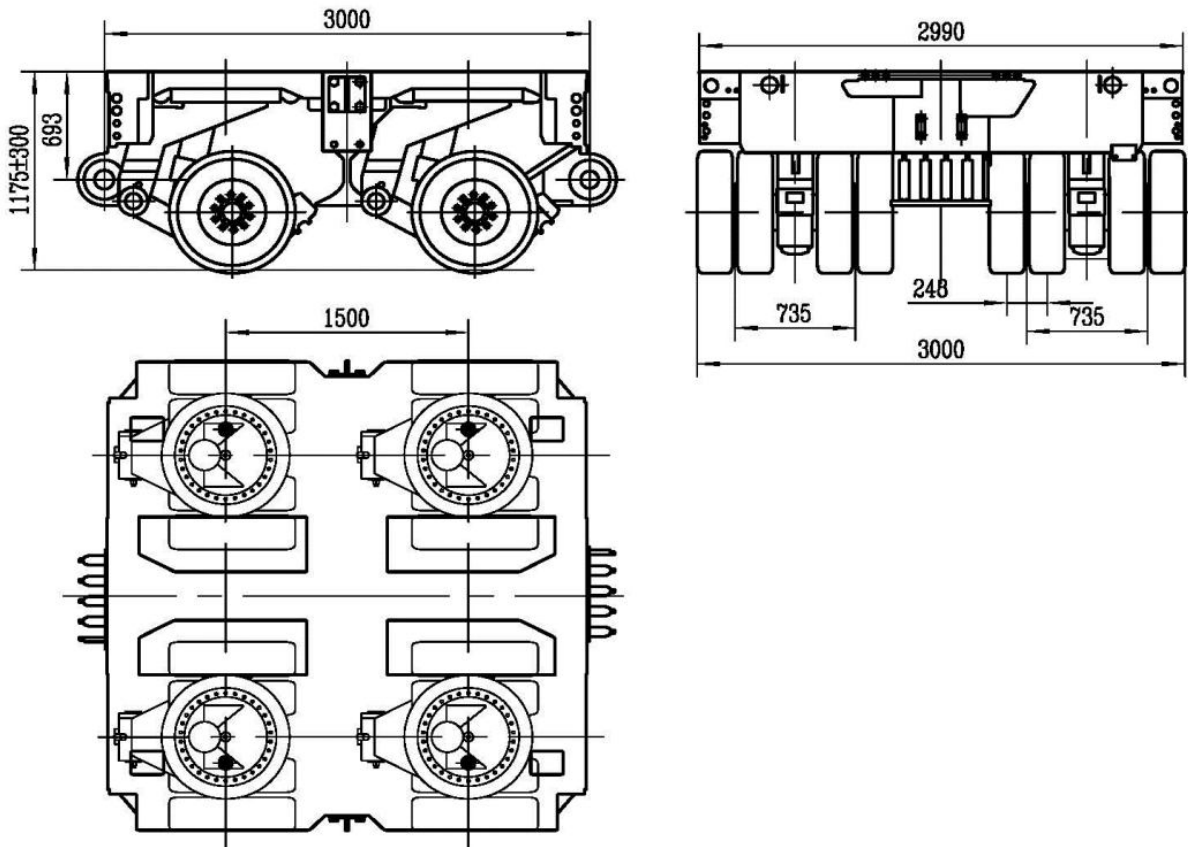


Three axle-lines Modular Multi-axle trailer

Axle Qty	3	
Speed (Km/h)	5	80
Maximum Total Mass (t)	102	49.2
Curb Weight (t)	10.5	
Rated Load (t)	91.5	38.7
Axle Load (t)	34	16.4
Length (mm)	4500	
Width (mm)	3000	
Height (mm)	1175±300	
Wheelbase (mm)	1500	
Wheel Tread (mm)	1800	
Tire Spec	215/75R17.5 135/133J	
Rim Spec	6.00-17.5	
Tire Qty	24	
Wheel Angle	55°	
Turn Radius (mm)	1500 (inside) 、 5800 (outside)	

Add: Room 2621,building 3,no.277,Zheqiao Road, PuDong, ShangHai China

Tel: +86-21-60514593

Fax: +86-21-60875039

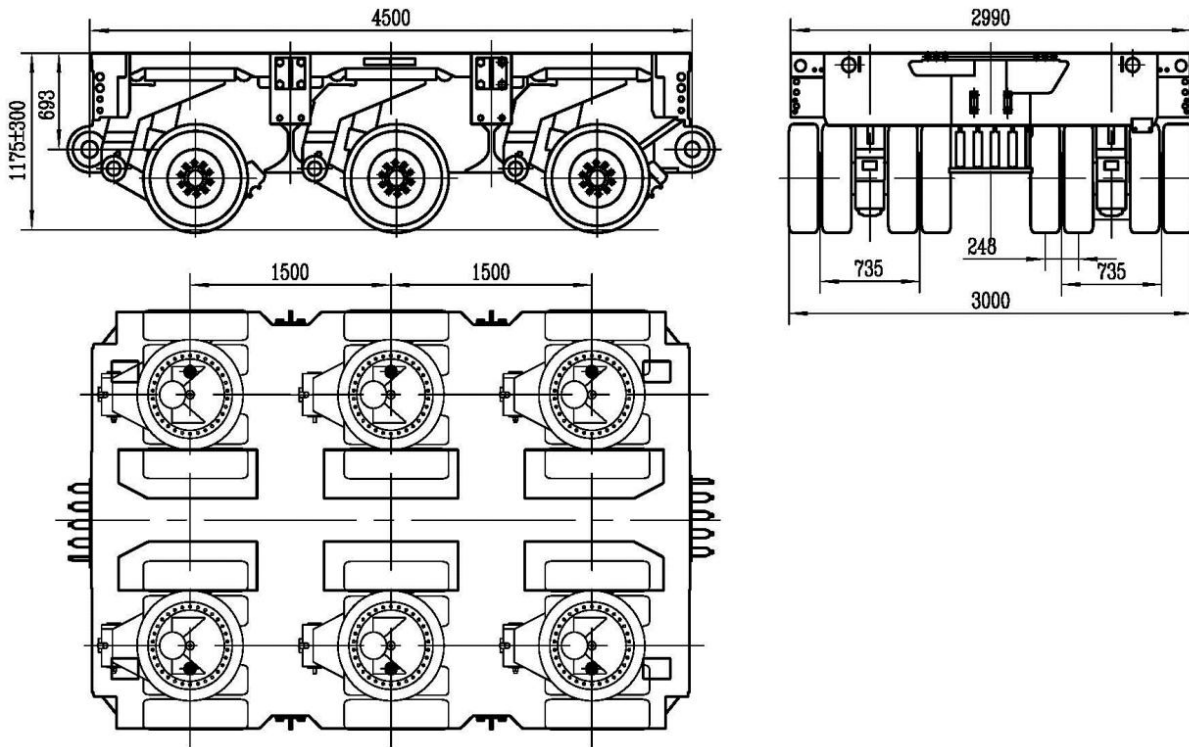


Four axle-lines Modular Multi-axle trailer

Axle Qty	4	
Speed (Km/h)	5	80
Maximum Total Mass (t)	136	65.6
Curb Weight (t)	13.2	
Rated Load (t)	122.8	52.4
Axle Load (t)	34	16.4
Length (mm)	6000	
Width (mm)	3000	
Height (mm)	1175±300	
Wheelbase (mm)	1500	
Wheel Tread (mm)	1800	
Tire Spec	215/75R17.5 135/133J	
Rim Spec	6.00-17.5	
Tire Qty	32	
Wheel Angle	55°	
Turn Radius (mm)	2600(inside), 7600(outside)	

Add: Room 2621,building 3,no.277,Zheqiao Road, PuDong, ShangHai China

Tel: +86-21-60514593

Fax: +86-21-60875039

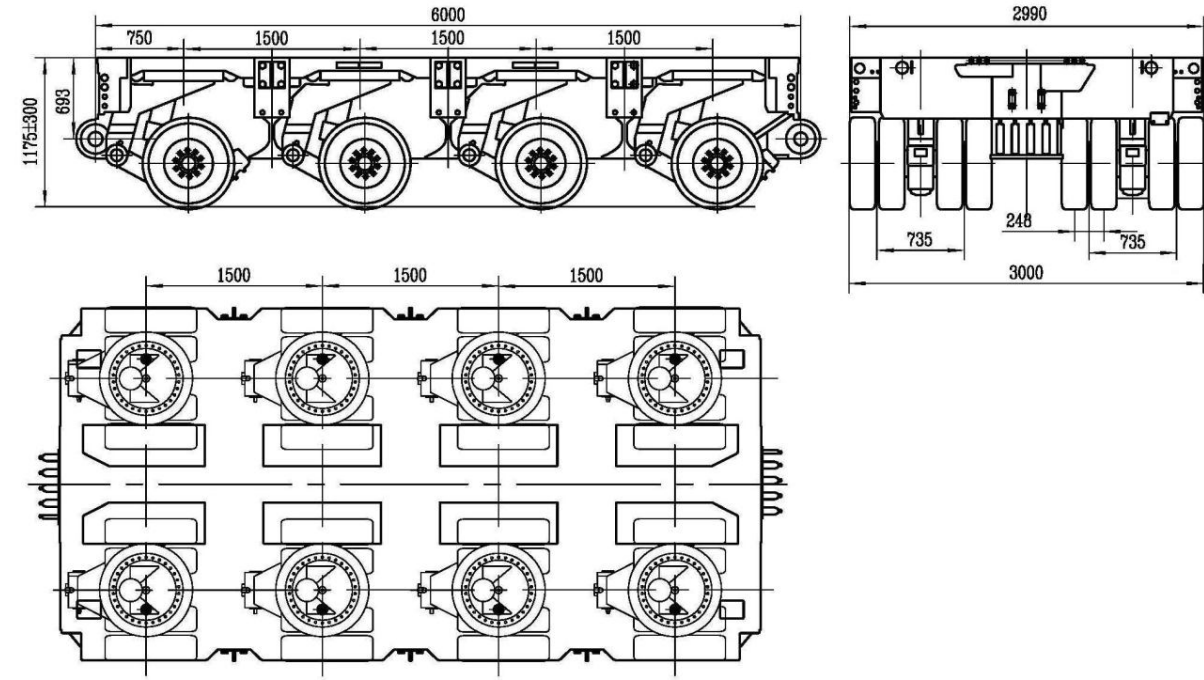


Five axle-lines Modular Multi-axle trailer

Axle Qty	5	
Speed (Km/h)	5	80
Maximum Total Mass (t)	170	82
Curb Weight (t)	17.5	
Rated Load (t)	152.5	64.5
Axle Load (t)	34	16.4
Length (mm)	7500	
Width (mm)	3000	
Height (mm)	1175±300	
Wheelbase (mm)	1500	
Wheel Tread (mm)	1800	
Tire Spec	215/75R17.5 135/133J	
Rim Spec	6.00-17.5	
Tire Qty	40	
Wheel Angle	55°	
Turn Radius (mm)	1500(inside), 5800(outside)	

Add: Room 2621,building 3,no.277,Zheqiao Road, PuDong, ShangHai China

Tel: +86-21-60514593

Fax: +86-21-60875039

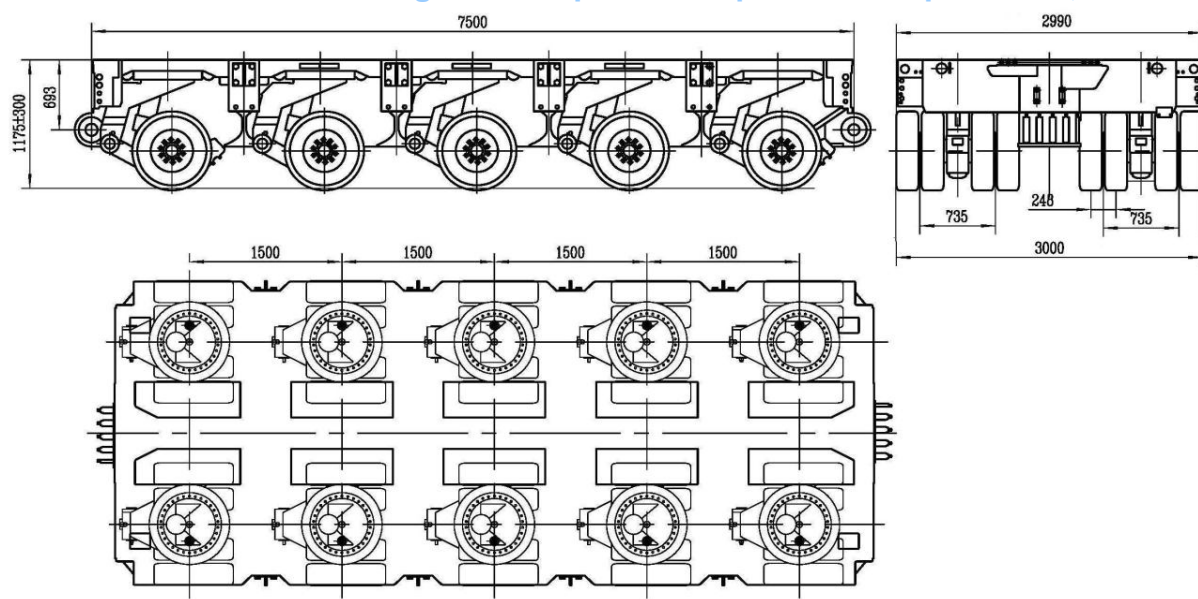


Six axle-lines Modular Multi-axle trailer

Axle Qty	6	
Speed (Km/h)	5	80
Maximum Total Mass (t)	204	98.4
Curb Weight (t)	21	
Rated Load (t)	183	77.4
Axle Load (t)	34	16.4
Length (mm)	9000	
Width (mm)	3000	
Height (mm)	1175±300	
Wheelbase (mm)	1500	
Wheel Tread (mm)	1800	
Tire Spec	215/75R17.5 135/133J	
Rim Spec	6.00-17.5	
Tire Qty	48	
Wheel Angle	55°	
Turn Radius (mm)	2000(inside), 9500(outside)	


Add: Room 2621,building 3,no.277,Zheqiao Road, PuDong, ShangHai China

Tel: +86-21-60514593

Fax: +86-21-60875039

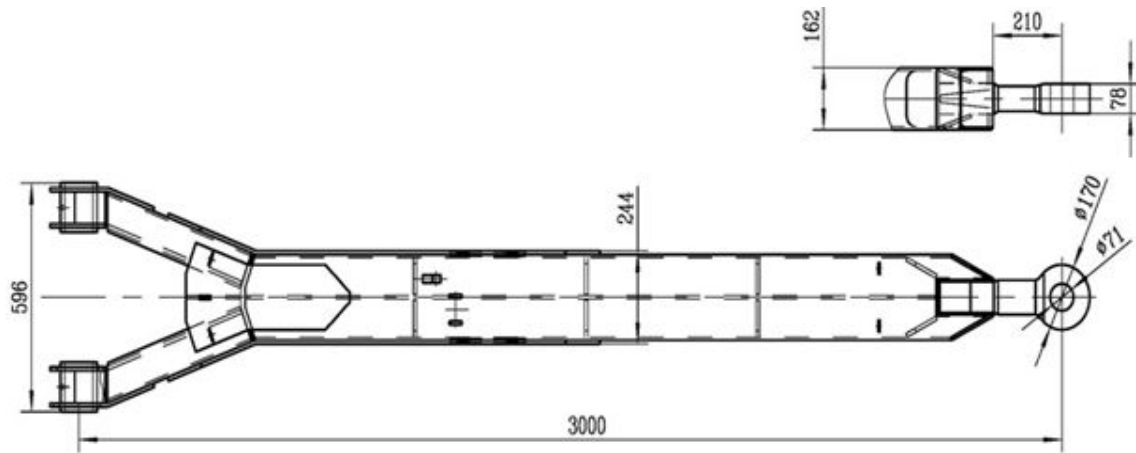

Power Gooseneck Specification

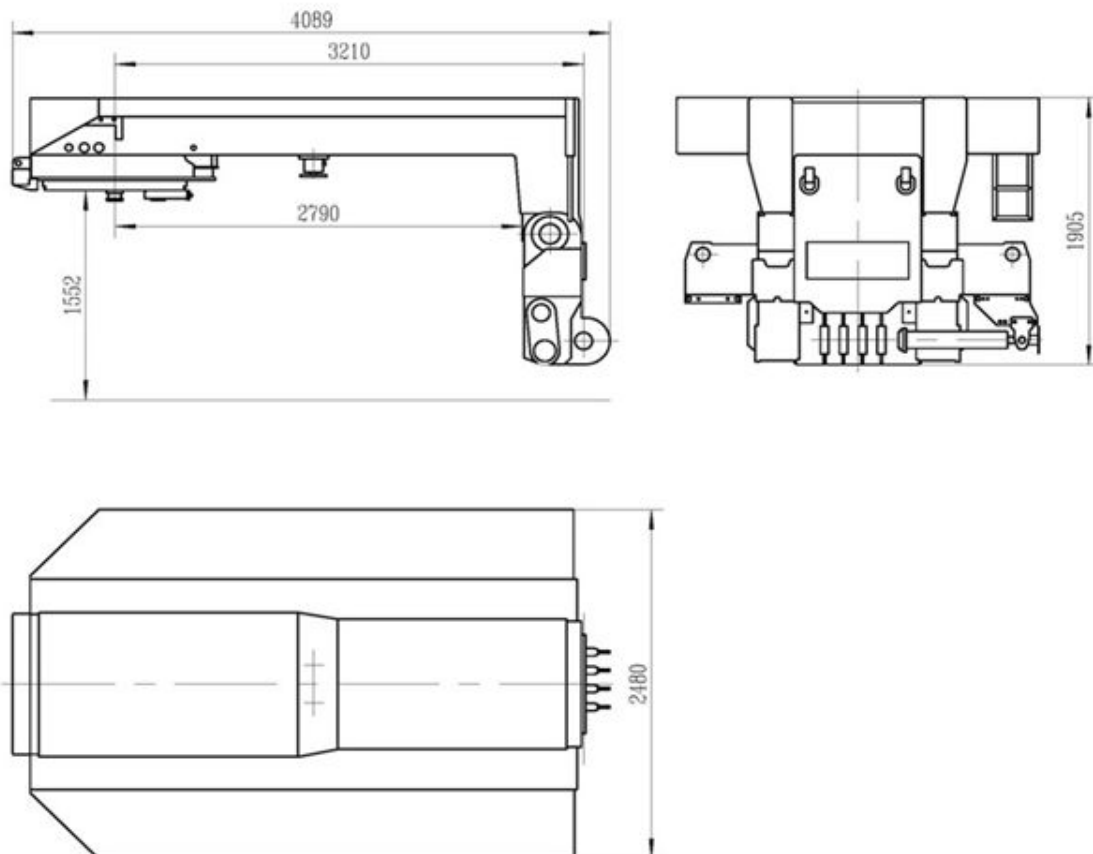



上海瑞千合进出口有限公司

上海瑞千合

Shanghai Ruiqianhe Import & Export Co., Ltd

Dimension (L*W*H)	4089*2480*1905mm
Fifth-wheel Rated Load	35t
Fifth-wheel Height	1552mm
Kingpin	90mm
Maximum Turn Angle	70°
Platform Height	1175mm
Weight	5600Kg

Add: Room 2621,building 3,no.277,Zheqiao Road, PuDong, ShangHai China
Tel: +86-21-60514593
Fax: +86-21-60875039